


UTE100 CHARACTERISTIC

This curve is to be used for application and coordination purposes only.
All time/current characteristic curve data is based on 40°C ambient cold start.

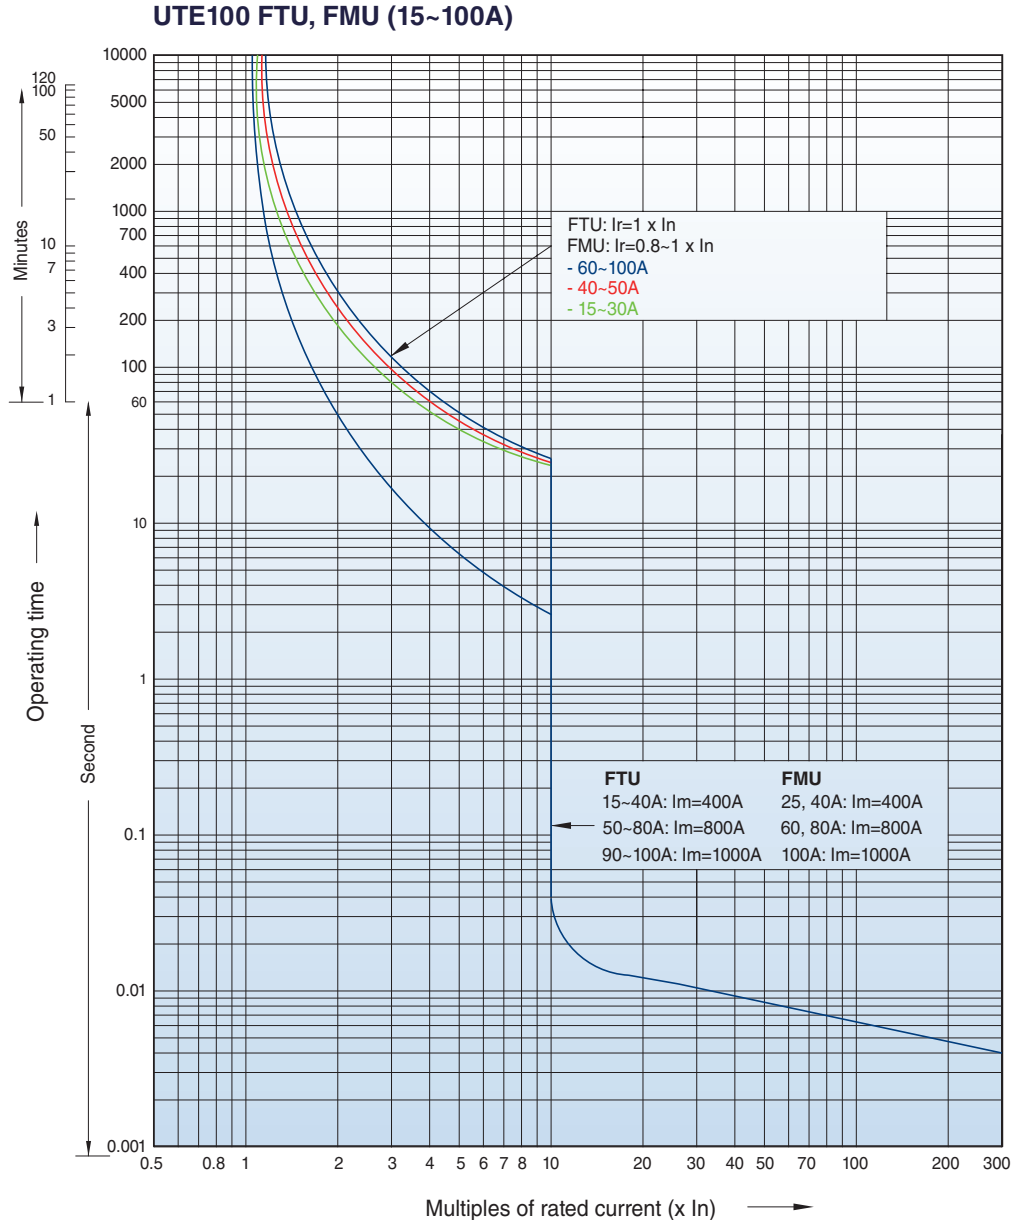

RATING UTE100	FTU	
	2P/3P	MAG TRIP (80%~130%)
15	○	400A
20	○	
25	○	
30	○	
40	○	
50	○	800A
60	○	
70	○	
80	○	
90	○	1000A
100	○	

RATING UTE100	FMU		
	3P	RATING RANGE	MAG TRIP (80%~130%)
25	○	20~25A	400A
40	○	32~40A	
60	○	48~60A	800A
80	○	64~80A	
100	○	80~100A	1000A